



PROSPEED FRESH FOODSERVICE SYSTEM

Elevate your production efficiency with ProSpeed™ Complete Line Solutions—designed to optimize your food processing operations, ensuring speed, accuracy, and superior quality.

The ProSpeed™ line encompasses a series of advanced systems tailored for various food applications, each integrating state-of-the-art interleaving and stacking technologies. By automating your production processes, these solutions enhance productivity, reduce labor costs, and ensure consistent results across your product offerings.


SYSTEM COMPONENTS: ProLeaver 13300 | Diverter | ProStax Dual Head Star Wheel Stacker | Rework and Checkweigher Conveyors (optional)

FEATURES

- **Compact Design for Maximized Space Efficiency:** Achieves nearly 50% line length and 60% width reductions, allowing for greater production output by fitting two systems where one typically fits.
- **Zero Downtime Paper Changeover:** Pivoting cutting module, jog buttons, and dual unwinds enable uninterrupted operation, ensuring maximum productivity.
- **Enhanced Safety Features:** Added safety head on diverters ensures operator protection and compliance with industry standards.
- **Simplified Maintenance and Cleaning:** Flat belting with tensioners and fully removable, adjustable conveyors streamline upkeep while reducing sanitation time.
- **Sleek and Hygienic Design:** Lexan® cabinets and panels deliver a modern aesthetic while meeting rigorous hygiene standards.
- **Optimized Workflow Integration:** Compact footprint and ergonomic accessibility allow seamless integration into existing production lines, maximizing efficiency.

**Elevate your production
with the ProSpeed** - where
precision meets versatility.

**Scan the QR code for a
personalized quote.**

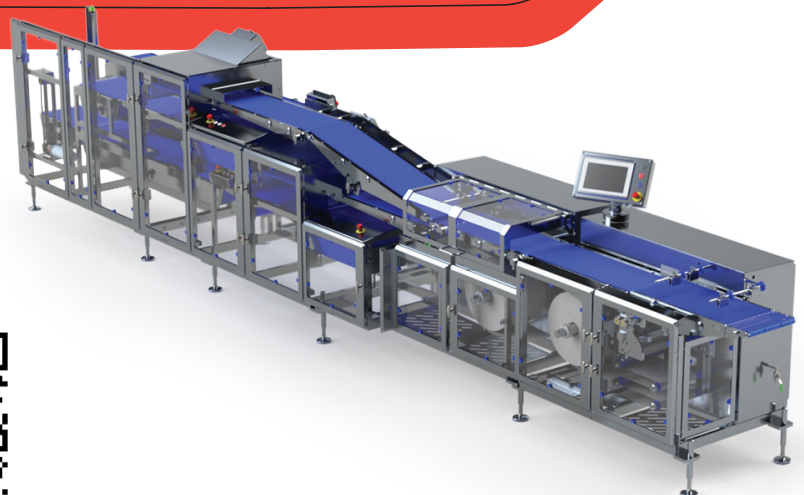

TECHNICAL SPECIFICATIONS

Operating Width

13"

Cut Length

4.5" minimum

Production Rates

Up to 150 portions per minute
(product dependent)

Multi-Lane Capability

No

Utilities

Electrical: 480 VAC, 3 Phase,
15 amp, 60 Hz

Pneumatic: 60 PSIG @ 0.25 SCFM

Interleaving Materials

Paper: Uncoated, Wet or dry
waxed, Silicone coated, Bakeable

Film: High or low density
polyethylene, Polystyrene

Rollstock: Up to 18" diameter x
16" wide with a 3" diameter core
(wider machines available)


Certifications

Patent Pending



TECHNICAL DRAWINGS

Top View

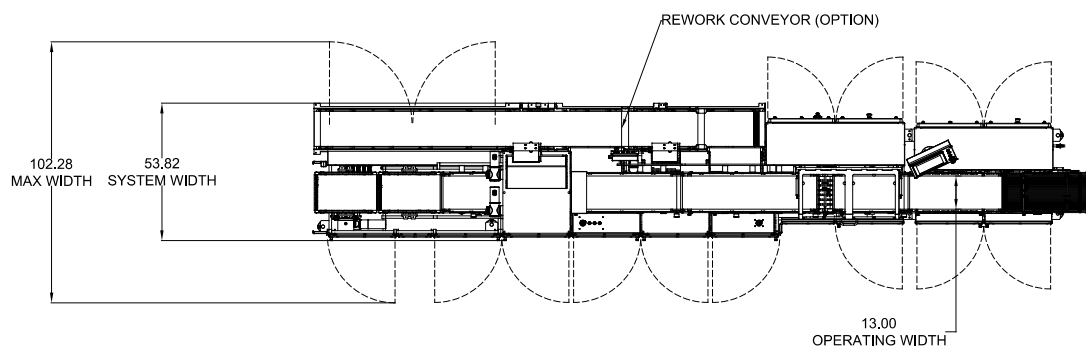

Front View

