



PROSPEED SAUSAGE SYSTEM

Elevate your production efficiency with ProSpeed™ Complete Line Solutions—designed to optimize your food processing operations, ensuring speed, accuracy, and superior quality.

The ProSpeed™ line encompasses a series of advanced systems tailored for various food applications, each integrating state-of-the-art interleaving and stacking technologies. By automating your production processes, these solutions enhance productivity, reduce labor costs, and ensure consistent results across your product offerings.

SYSTEM COMPONENTS: Merging Conveyor | Metal Detector/Infeed Conveyor | ProLeaver 32300 | ProStax Platform Stacker

FEATURES

- **Versatile Size Options:** Available in 20", 26", and 32" formats to accommodate various production needs.
- **Durable Wash-Down Construction:** Durable stainless steel design for easy cleaning and sanitation.
- **Product Alignment:** Advanced grouping system corrects misalignment in multi-lane operations.
- **Customizable Integration:** Standard and custom designs easily interface with existing production setups.
- **Temperature-Controlled Enclosures:** Fully gasketed control and drive enclosures maintain optimal operating conditions.
- **User-Friendly PLC Design:** Simplifies setup, recipe changes, and equipment networking.
- **Extended Production Capability:** Dual paper roll stand option available for uninterrupted production runs.
- **Remote Monitoring and Diagnostic System (RMDS):** Provides real-time oversight and troubleshooting capabilities.



Elevate your production with the ProSpeed - where precision meets versatility.

Scan the QR code for a personalized quote.



TECHNICAL SPECIFICATIONS

Operating Width

32"

Cut Length

4.5" minimum

Production Rates

Up to 70 portions per minute,
per lane (product dependent)

Multi-Lane Capability

Yes

Utilities

Electrical: Grounded 480 VAC,
3 Phase, 30 amp, 60 Hz

Pneumatic: 80 PSIG @ 0.5 SCFM

Interleaving Material

Paper: Uncoated, Wet or dry
waxed, Silicone coated, Bakeable

Film: High or low density
polyethylene, Polystyrene

Rollstock: Up to 18" diameter x
32" wide with a 3" diameter core


Certifications

Patent Pending



TECHNICAL DRAWINGS

Top View

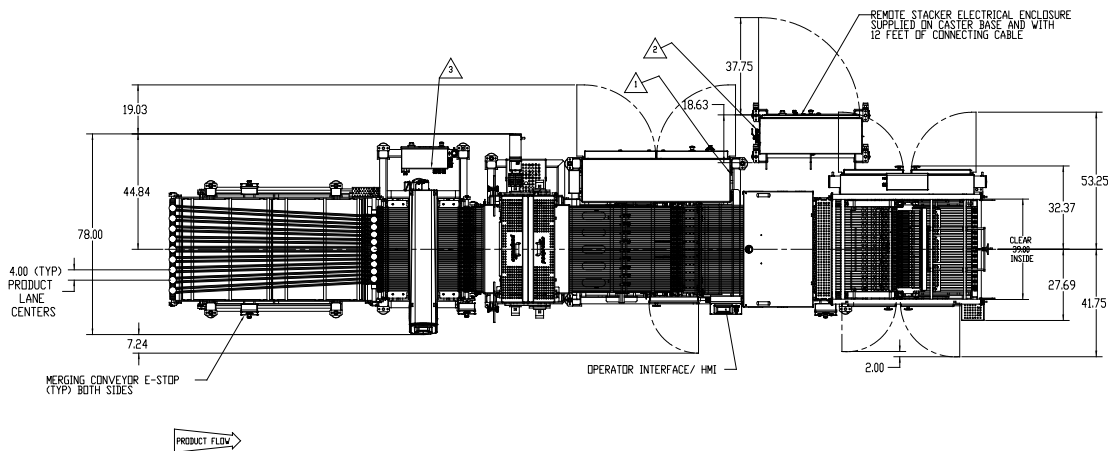

Front View

